


# Technical Specification Data Sheet

**Product: B671AC-ECO Bottom Entry Adjustable Height Torbeck® Ecofil®**

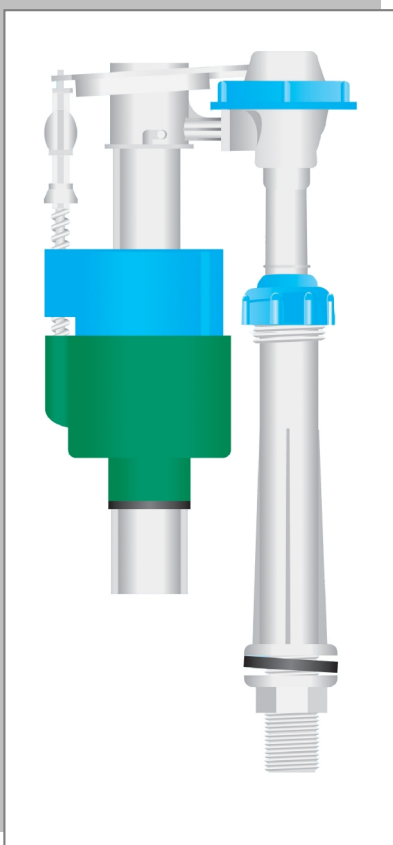

**Approvals:**

WRAS Approval No 0506106

**Standards:**

Conforms To BS1212 Part 4

**Aprox Weight:**

258g

**Materials:**

POM, Rubber

**Packaging:**

Polythene Bag

**Valve Type:**

Part 4 Equilibrium Valve

## **Product Specification**

- Working Pressure – From 0.1 Bar to 10 Bar Mains Water Pressure
- Height Adjustable – From 8.5" to 12"
- Delayed filling action could save up to 1 Litre per flush.
- Quiet Filling – Noise level below 60dB (Normal Conversation 60 – 70dB)
- Pressure Restrictors Supplied to control Flow rates
- Removable filtration - 200 Micron Filter
- Small foot print allows for fitting into tight cisterns
- Normal Working Temperature – 0°C – 20°C
- Inlet Thread – ½" BSP to suit tap connector
- Made From Recyclable Materials
- 100% Tested and Manufactured in Hereford, England, UK